

iSLDMB




2023-01 v2

Trusted by coast guards around the world

The Iridium® SLDMB (iSLDMB) is an innovative rugged compact A-size Self Locating Datum Marker Buoy. The iSLDMB was designed and tested to meet the stringent performance requirements of coast guards for Search and Rescue (SAR) operations in the open ocean. The iSLDMB design is based on the proven CODE/Davis style oceanographic surface drifters.

The inexpensive expendable drifter is equipped with an Iridium® bi-directional satellite transmitter, sea surface temperature sensor, and a GPS receiver. Due to the urgency of SAR situations, the iSLDMB is able to communicate critical data in real-time to the end-user. Robustly designed, the iSLDMB is air certified and can be deployed with ease from ships, fixed wing and rotary wing aircraft. The drifter's operating life is up to 15 days depending on the required data transmission rate.

- Reliable and innovative design
- Iridium® telemetry
- Bi-directional communication
- NATO A-size compliant
- Air or ship deployable
- Real-time data
- Iridium® certified

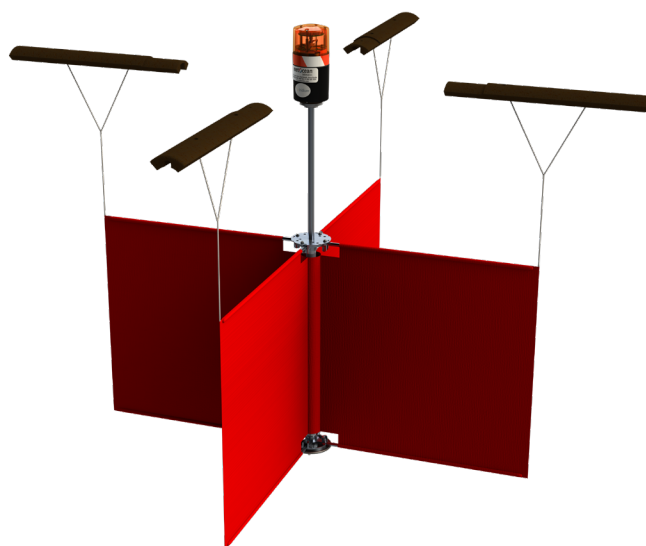

OPERATION CONDITIONS		
Air Temperature	-20 °C to 35 °C	-4 °F to 95 °F
Water Temperature	-2 °C to 35 °C	-28 °F to 95 °F
Water Type	Fresh or Salt	
Significant Wave Height	3 m	9 ft
Wind Speed	10 m/s	22 knots
Wind Gusts	13 m/s	25 knots
External Humidity	100%	
Sunlight	Direct Exposure	
Operating Life at 10°C	Up to 15 days	
Shelf Life	36 months with storage conditions at ~21°C	
SURVIVAL CONDITIONS		
Air Temperature	-30 °C to 35 °C	-22 °F to 95 °F
Water Temperature	-2 °C to 35 °C	-28 °F to 95 °F
Significant Wave Height	4 m	13 ft
Wind Speed	14 m/s	27 knots
ELECTRONICS		
Controller	GPT II	
Iridium Transceiver	9602 SBD	
Antenna	Low profile dual band Iridium / GPS	
Power Supply	10 alkaline-manganese dioxide AA cells	
SENSORS		
Sea Surface Temperature	US sensor ±.05 °C thermistor	
Battery Voltage	Precision resistive divider	
GPS Receiver	Navman Jupiter 32	
DEPLOYMENT		
Deployment Options	Vessel, rotary wing aircraft, or fixed wing aircraft	
AIR DEPLOYMENT PARAMETERS		
Rotary Wing Aircraft		
Hover: 50 – 10,000 ft		
70 to 90 KIAS: 100 – 10,000 ft		
Fixed Wing Aircraft		
120 to 220 KIAS: 200 – 10,000 ft		
OPERATING PARAMETERS		
Rapid SAR Mode	The first 24 hours after deployment data sampled and transmitted every 10 minutes	
Standard SAR Mode	The next 48 hours after deployment data sampled and transmitted every 30 minutes	
Scientific Mode	Active until end of battery life	
CERTIFICATIONS		
Form factor, ballistic coefficient, center of gravity (COG) and mass match NATO A-Size parameters of pre-existing certified sonobuoys.		



FOR FURTHER SALES
INFORMATION CONTACT:
sales@metocean.com

CANADA - HQ
11 Thornhill Drive
Dartmouth, Nova Scotia
B3B 1R9
+1 902 468 2505

UNITED STATES
1750 Tysons Blvd, Suite 1500
Office 1547, McLean, Virginia
22102
+1 844 728 286

UNITED KINGDOM
Hilldale Farm, Titchfield Lane
Wickham, Hampshire
PO17 5NZ
+44 1489 888 555